

INTERIOR



*Rubio*<sup>®</sup>  
MONOCOAT

**MAINTENANCE INSTRUCTIONS**

Rubio<sup>®</sup> Monocoat Oil Plus 2C

## CLEANING *interior*



Legend:



### RMC SOAP

For regular cleaning of oiled surfaces. Removes all dirt and grease thoroughly, without leaving a film. Keeps the mat, natural look of the wood. RMC Soap is very concentrated and hence very economical.

#### INSTRUCTIONS:

**01.** Vacuum the surface. **02.** Pour a maximum of 50 to 100 ml of RMC Soap in a bucket with 10 L of water. **03.** Clean the surface with a mop. **04.** Allow to dry: +/- 15 minutes.



### RMC SURFACE CARE

RMC Surface Care is the handy, ready to use version of RMC Soap. Suitable for fast cleaning of small floor surfaces and local spots on wooden floors, coffee tables, counter tops,...

#### INSTRUCTIONS:


**01.** Spray Rubio Monocoat Surface Care on to the surface to be cleaned. **02.** Wipe dry with a mop or microfiber cloth. **03.** Allow the surface to dry for approximately 15 minutes.



#### TIPS:

- Clean maximum once a week with RMC Soap or RMC Surface Care. Cleaning too often or with too much RMC Soap or RMC Surface Care may leave a thin layer on the surface, which dirt and dust may adhere to.
- Do not leave any water on the surface, a damp-clean is sufficient. Do not walk on the floor until it is completely dry.
- The best working method is with two buckets: one with the soap mixture and one with clean water to rinse the dirt out of the mop.

## REMOVING STAINS *interior*



1

**RMC SOAP** or  
**RMC SURFACE CARE**

If the stains have not disappeared,  
proceed to step 2.



2

OR




OR



**SPECIFIC STAIN REMOVERS**

*calcareous water stains, grease stains and  
black/tannin stains*

If the stains have not disappeared,  
proceed to step 3.



3

+



**RMC OIL PLUS 2C**

*Re-sand and oil locally*

Legend:



RMC SOAP or  
RMC SURFACE CARE



RMC LIMESPOT  
REMOVER



RMC GREASE  
REMOVER



RMC TANNIN  
REMOVER



SPOT  
SANDING



RMC OIL  
PLUS 2C

## RMC LIMESPOT, GREASE & TANNIN REMOVER

Although many stains can be removed with RMC Soap and RMC Surface Care, Rubio Monocoat also developed a number of specific stain removers. Stubborn lime stains can be handled effectively with RMC Limespot Remover, grease stains with RMC Grease Remover and black/tannin stains with RMC Tannin Remover.

If the stain has penetrated the wood too deeply, the spot can be sanded and re-oiled.

### WHICH PRODUCT FOR WHICH STAIN?



#### RMC Limespot Remover

- › Lime stains and other alkaline stains,  
e.g. urine, fertilizers, rust stains, radiator water, etc.
- › Also: white rings



#### RMC Grease Remover

- › Grease stains  
e.g. olive oil, frying oil, crisps, oil, etc.
- › Also: heel marks and floor polish



#### RMC Tannin Remover

- › Black/tannin stains e.g. rings/stains from cans, flower pots, etc.
- › Also: - After water damage on parquet.  
- In case of efflorescence on exterior wood (on the bottom of gates, doors, on walls).

### INSTRUCTIONS:



**01.** Spray the product onto the stain. **02.** Allow several minutes for absorption. **03.** Use a damp cloth to remove the stain. **04.** To remove stubborn stains, it is recommended to repeat the process until the desired result is achieved. **05.** Allow the surface area to dry.




### TIPS:

- After a treatment with RMC Limespot Remover, RMC Grease Remover or RMC Tannin Remover, you may need to apply some oil in the original colour on the spot.
- If the surface becomes too stain-sensitive, maintain with RMC Oil Plus 2C (in the original colour applied) to repair both colour and protection. More info about this on the next pages.

## REFRESH & RENOVATE *interior*

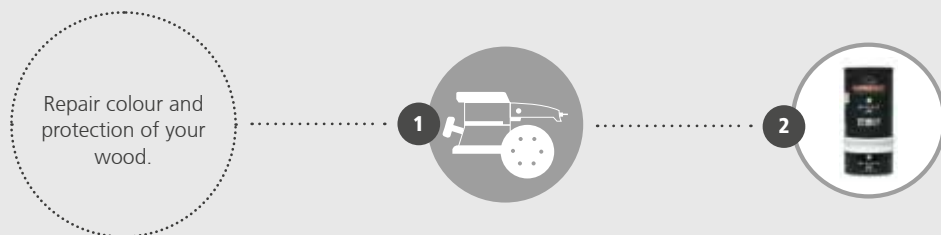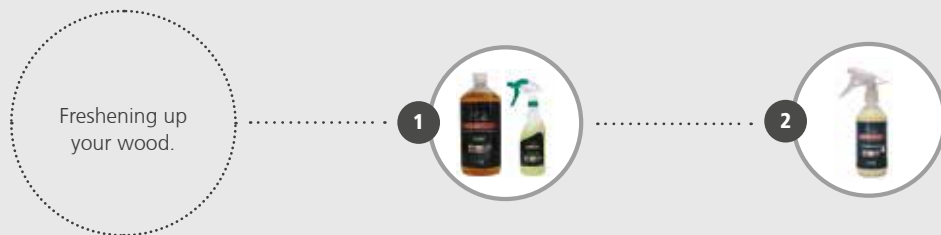

Legend:



### RMC REFRESH ECO

A ready-to-use sprayable product that refreshes and restores all wooden surfaces that have been treated with oil.

#### INSTRUCTIONS:

**01.** Clean the surface to be treated with RMC Soap or RMC Surface Care. Let it dry. **02.** Spray a little amount of RMC Refresh Eco on the surface to be treated. **03.** Spread out the product in the direction of the fibres of the wood with a microfiber cloth. **04.** Let the surface dry for at least 1 hour.




### RMC OIL PLUS 2C

If the treated surface shows too much wear and tear, or needs a colour repair, maintain with RMC Oil Plus 2C in the original colour.

#### INSTRUCTIONS:

**01.** Lightly sand the surface with a polishing machine with net 120 or an RMC pad GS320. **02.** Vacuum thoroughly and remove dust remnants with RMC Cleaner. **03.** Carefully mix the two components (1 to 2 minutes) at a ratio of approx. 3 units A to 1 unit B. **04.** Once the cleaned surface is dry, apply a small amount of RMC Oil Plus 2C (cloth or polishing machine with thin beige RMC pad). Work in zones of 5 - 10 m<sup>2</sup>. **05.** Let absorb during a few minutes. Thoroughly remove all excess of oil (cloth or polishing machine with white pad) within 15 minutes per zone. The surface should feel dry! Finish all zones the same way. **06.** In a well ventilated room, the surface can be used 24 - 36 hours after the application.

#### ATTENTION

 Cloths, saturated with oil, may spontaneously combust. After usage, they need to be soaked in water before disposal.

Indicate the colour you used:



Date of application: \_\_\_\_\_

Your parquet installer/distributor:

**Rubio® Monocoat Headoffice** | Ambachtenstraat 58 - 8870 Izegem - Belgium  
Tel. +32 (0)51 30 80 54 | Fax +32 (0)51 30 99 78 | [info@rubimonocoat.com](mailto:info@rubimonocoat.com) | [www.rubimonocoat.com](http://www.rubimonocoat.com)

Copyright © 2016 Muylle Facon BVBA, Izegem (Belgium).

