

EXTERIOR



*Rubio*<sup>®</sup>  
MONOCOAT

**MAINTENANCE INSTRUCTIONS**

Rubio<sup>®</sup> Monocoat Hybrid Wood Protector

How do I keep  
my exterior wood  
clean?



### RMC EXTERIOR SOAP

RMC Exterior Soap is a soap with a cleaning and nourishing action. This product is used to clean external wooden surfaces, which have been treated with an oil from the Rubio Monocoat exterior assortment. Suitable for interim cleaning.

**INSTRUCTIONS:**

**01.** Wet the patio. **02.** Shake the bottle, to mix the contents thoroughly. **03.** Pour 1 litre of RMC Exterior Soap into a bucket. Add 3 litres of clean water. **04.** Clean with a floor cloth or fluff-free duster. **05.** Allow the surface to dry for approx. 30 minutes.



### RMC EXTERIOR SOAP ECOSPRAY

RMC Exterior Soap Ecospray is the handy, ready-to-use version of RMC Exterior Soap. This spray is suitable for cleaning smaller surfaces. The spray can be refilled with RMC Exterior Soap.

**INSTRUCTIONS:**

**01.** Wet the patio. **02.** Shake the bottle, to mix the contents thoroughly. **03.** Spray the product on the surface. **04.** Clean with a floor cloth or fluff-free duster. **05.** Allow the surface to dry for approx. 30 minutes.



## REFRESH & RENOVATE *exterior*



**WHEN?** *annually*



**WHEN?**

- 1st maintenance: generally after 1 year
- further maintenance: every 3 to 5 years



RMC EXTERIOR WOOD CLEANER



ALLOW TO DRY



RMC HYBRID WOOD PROTECTOR



CLEAN WET with water

### RMC EXTERIOR WOOD CLEANER

RMC Exterior Wood Cleaner is a product for the cleaning of wooden patios, fences, exterior doors, carports,... The product removes grey discolouration, green deposits and dirt.

#### INSTRUCTIONS:

**01.** Dampen the surface with water. Use a garden hose. **02.** Apply some RMC Exterior Wood Cleaner. **03.** Scrub the treated area with a nylon scrubbing brush in the lengthwise direction of the wood until it is clean. This will cause the product to foam. For stubborn stains, repeat the treatment. **04.** Rinse thoroughly until all the foam has disappeared. **05.** Allow the surface to dry well (± 30 minutes at a temperature of 20 °C and proper ventilation) **06.** Treat with the Rubio® Monocoat exterior wood protection product of your choice.



### RMC HYBRID WOOD PROTECTOR

Refreshing the colour and protection of wood treated with RMC Hybrid Wood Protector is done with the same product, in the original colour. Sanding will not be necessary!

#### INSTRUCTIONS:

**01.** Clean the surface with water. Allow to dry. **02.** Apply the oil. **03.** Allow a few minutes to react. **04.** Remove any excessive oil.



#### ATTENTION

Cloths, saturated with oil, may spontaneously combust. After usage, they need to be soaked in water before disposal.



#### TIPS:

- The frequency of maintenance of vertical wood can differ from project to project. Depending on the wood type, the colour of the oil and the location, maintenance will be required sooner for some than for others. Patios should have maintenance every year.



Breitenthäler, Austria



©Extremis, Belgium




Private house, Belgium



Villa Foresta, La Réunion

Indicate the colour you used:

Date of application: .....

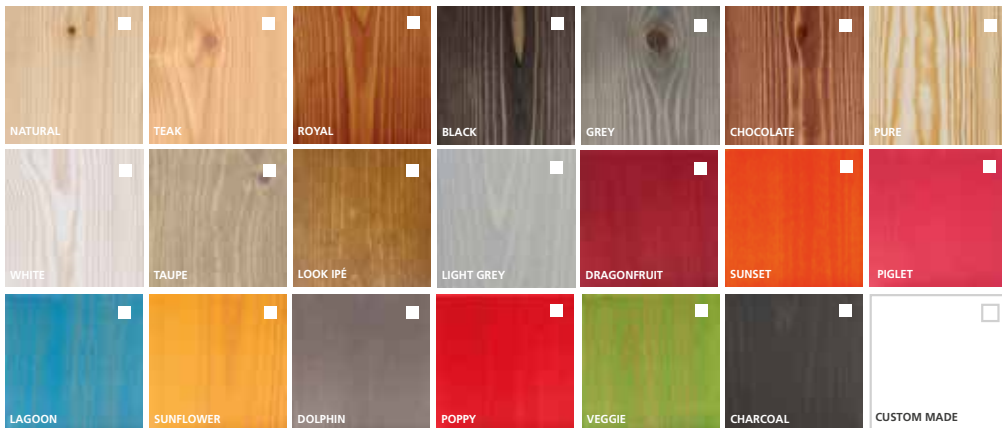

### Maintenance calendar:

When was your wood treated? ..... / ..... / .....

Maintenance 1: ..... / ..... / ..... Maintenance 2: ..... / ..... / .....

Maintenance 3: ..... / ..... / ..... Maintenance 4: ..... / ..... / .....

Further maintenance: .....

Your parquet installer/distributor:

